


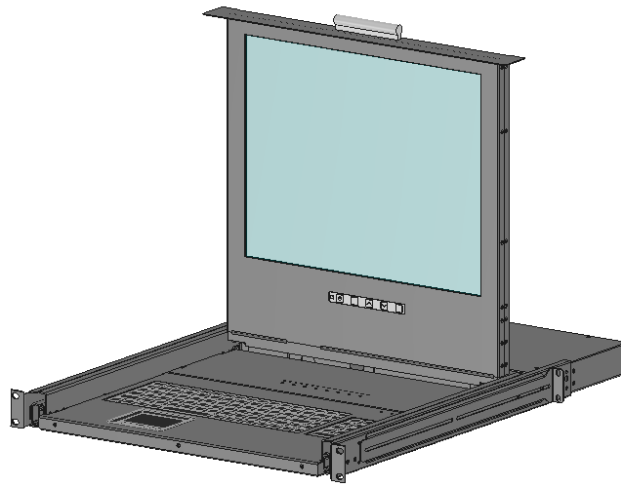

### Specification

|                                |                                                                |
|--------------------------------|----------------------------------------------------------------|
| Model No                       | ATN-151MKP+3-KVM8                                              |
| Weight                         | 15.5 Kg (N/W) 17.9 (G/W)                                       |
| Dimension                      | 19"x 1.75" x 24.35"<br>482.6mm x 44.45mm x 618.5mm(W x H x D ) |
| Carton Dimension:              | 600mm x 720mm x 160mm                                          |
| Power Supply                   | AC 100/240V auto switching                                     |
| Extension Rail                 | Up to 30.3" (77mm)                                             |
| Construction Material          | Industrial Metal                                               |
| Keyboard                       | 104 key with touchpad                                          |
| USB port on front              | Option                                                         |
| Color                          | Black/ White(PANTONE 413C)                                     |
| Operation Temperature          | 0 to +50°C (32 to 122°F)                                       |
| Storage (Shipping) Temperature | -20 to +60°C (-4 to 140°F)                                     |
| <b>Display</b>                 |                                                                |
| Diagonal                       | 432 (17")                                                      |
| LCD Resolution                 | 1280 x 1024                                                    |
| Viewing angle                  | 80(left),80(right),80(up),80(down)                             |
| Luminance                      | 300(nits)                                                      |
| Contrast Ratio                 | 800:1                                                          |
| Frame Rate                     | 60Hz typ., 75Hz max.                                           |
| RoHS                           | Compliance                                                     |
| <b>KVM</b>                     |                                                                |
| Compatible OS                  | MS-DOS, Windows, Linux, Unix, FreeBSD                          |
| Front Panel                    | Two Color LEDs 8 Buttons                                       |
| Max. Connected PCs             | 64                                                             |
| Connector To PC                | Monitor: D-Sub 15, Keyboard: PS/2, Mouse: PS/2                 |
| Switch Methods                 | Push Button, Hot-key, OSD Menu                                 |
| On Screen Display (OSD)        | Yes                                                            |
| Auto Scan Interval             | 1-255 sec                                                      |